



WÜRTH IS QUALITY AND SERVICE

Würth is your specialist for assembly and fastening materials, technicalchemicals, abrasives, and other material processing, workshop equipment, hand tools, power tools, auto electrical accessories, safety gear, and PPE. Würth has become the trusted supplier in the automotive, cargo, construction, mining, wood working and manufacturing industries.

The Würth Group is the global market leader in the development, production and sale of fastening and assembly materials. The family-owned company was founded in 1945 in Künzelsau, Germany and holds over 3.8 million customers worldwide that trust in Würth today.

Our goal lies in simplifying our customers' daily work. We excel as problem-solvers with unique and innovative products and services through a range of Sale Channels tailored to the customers' needs and location.

We ensure accessibility and excellence through:

Our Multi -Channel Strategy:

1. Direct sales consultants in the field

2. Convenient pickup shops

3. Comprehensive online shop

Our online platform provides detailed product information, certificates. and technical data sheets for customer convenience.

WHY CHOOSE WÜRTH KENYA LTD?

GERMAN QUALITY:

Each Würth product is fit-for purpose, top quality, durable and reliable, and has been subjected to tougher testing by us than it will ever face in real applications.

GLOBAL REACH:

As part of the Würth Group, compromising over 400 companies and 87,000 employees in 80+ countries, we leverage a vast international network to serve you better.

EXTENSIVE PRODUCT RANGE:

With over 125,000 products ranging from hand tools to automotive consumables, we've got you covered across various industries.

"The culture of the Würth Group is marked by mutual trust, reliability, honesty and righteousness, inside and outside the company."







CHEMICALS



WINDOW ADHESIVE CLASSIC PLUS ART.-NO. 0890023701

APPLICATION

 Can be used for all standard vehicle types in the passenger car, commercial vehicle, bus, van and agricultural and construction machinery sectors



VARIOPRIMER SAFE + EASY ART.-NO. 0890024021

APPLICATION

 Primer for promoting adhesion of the window adhesive on glass, ceramic silkscreen printing, lacquer and various metals. The primer provides corrosion protection for bare metals and acts as an activator for trimming PU/PVC pre-coated windows.



STONE CHIPPING AND CORROSION PROTECTION AQUA

ART.-NO. 0890030

APPLICATION

 For repair and/or restoration of the original structure and for protection against stone chips and corrosion in all visible areas, e.g. front and rear valances, side skirts, etc. Highly suitable as anti-drone mass for indoors, e.g. doors, engine and luggage compartment.

VURTH VERISER PRAY REEZER PRAY

FREEZER SPRAY ART.-NO. 0890001200

APPLICATION

 For cooling transistors, resistors and engine parts in the automative sector, e.g. carburettor and injection systems, in order to test the function of cold start equipment. For preventing heat damage in the area around the sites of soldering operations.

MURTH Kontart IPar IPar



APPLICATION

 For repair and/or restoration of the original structure and for protection against stone chips and corrosion in all visible areas, e.g. front and rear valances, side skirts, etc. Highly suitable as anti-drone mass for indoors, e.g. doors, engine and luggage compartment.

FUELCURE ART.-NO. 0893559559

APPLICATIONFuel moisture removal



CHEMICALS

WURTH

CONTACT SPRAY OXIDATION SOLVENT ART.-NO. 089360

APPLICATION

- Cleans all types of contacts
- Removes oxide and sulphide coatings, resin, oil and dirt
- Eliminates "bangs" as well as impermissible high voltage resistances

CLEANING/CARE AIDS



HAND CLEANER IN TUB ART.-NO. 0893900001

APPLICATION

• Deep cleans hands and removes dirt such as oil, grease, graphite, metallic dust and soot.



WALL BRACKET ART.-NO. 08919002

APPLICATION

• For wall mounting of the hand cleaner 4.5 litre bucket

DISPENSING PUMP FOR 4000 ML BUCKET OF HAND CLEANER

ECONOMY

ART.-NO. 089390020

ACCESSORY HNDCLNR-PLUS-BUCKET-4000ML SKIN

ART.-NO. 08919011

INDUSTRIAL HAND CLEANER

APPLICATION

• This product is suitable for automobile repair, machinery printing, coal oil, metal and other relative industrial master dirty hands skin cleaning





ADHESIVES APPLICATION • Universal use for sealing overlaps and screw connections in the vehicle sector, container and caravan construction, e.g.: Between mudguards and bodywork, on brake lights and tail lights, on **ROUND BODYWORK TAPE** trims and sunroofs. ART.-NO. 0890100032 • Can also be used for general sealing to protect against dust, moisture and vibration in electrical work, mechanical engineering and construction as well as in air conditioning and ventilation, e.g. between screwed parts, seam areas, joints, all kinds of housings and pipe penetrations. APPLICATION • For sealing engines and housings in the automotive and motorcycle industry, tractor construction, elec-**DP 300 ENGINE AND** trical industry, turbine and nuclear power plants, HOUSING SEALING mechanical engineering, gear construction, food industry, in gas, water and electricity plants, pump COMPOUND For sealing particularly demanding and critical ART.-NO. 0890100048 sealing connections due to its excellent thermal, mechanical and chemical resistance APPLICATION **SPRAY ADHESIVE** • Ideally suited for the automotive sector, in dealership workshops, in the construction of switch ART.-NO. 0890100055 cabinets and ventilation systems, model building and industrial areas. The product can be used as a contact and assembly adhesive. APPLICATION Prevents vibration noise in the interior caused by vi-SOUND-ABSORBING PLATE brating body parts, such as the wheel arch, cardan tunnel, floor group, doors and other side parts. ART.-NO. 0890100060 **BOND AND SEAL STRUCTURAL** VARIANTS **ADHESIVE WHITE** Contents Container Colour Art.-no. ee A / ART.-NO. 08901001 40 / in accor APPLICATION 08901002 300 ml Cartridge Grey dance with DIN 53505 • For a range of bonding and sealing tasks 40 / in accor Suitable for bonding and sealing in food process-08901003 300 ml Cartridge Black dance with DIN 53505 ing plants • For the permanently elastic sealing of spot weld seams **BOND AND SEAL STRUCTURAL ADHESIVE WHITE** VARIANTS ART.-NO. 0890100181 Art.-no. Contents Container Colour APPLICATION 0890100183 600 ml Bag Black • For a range of bonding and sealing tasks

TRANSPARENT ART.-NO. 08925701

SILICONE ACETATE

APPLICATION

ing plants

seams

• Sealing of expansion joints exposed to medium loads, for indoor and outdoor use.

• Suitable for bonding and sealing in food process-

• For the permanently elastic sealing of spot weld

VARIANTS			
Artno.	Colour	Container	Contents
08925701	Transparent	Cartridge	310 ml
08925702	White	Cartridge	310 ml
08925705	Black	Cartridge	310 ml



ADHESIVES

Ш


APPLICATION · For dynamically loaded structural bonded con-**BOND AND SEAL POWER** nections and seam and joint sealing in bodywork, vehicle and caravan construction, railway carriage STRUCTURAL ADHESIVE and container construction, metal and equipment ART.-NO. 08932351 construction, air-conditioning and ventilation duct construction, in the food industry, and much more APPLICATION • For medium-strength retaining, fixing and sealing of threaded connections such as screws, stud bolts, **MEDIUM-STRENGTH SCREW** nuts and threaded plugs, which are supposed to RETAINER be detached again with normal tools. The medium-strength threadlocker is for use in the automotive ART.-NO. 0893243050 and commercial vehicle industry, in metalworking and tool manufacturing, shipbuilding, mechanical engineering and engine construction, and electrical and electronics construction. APPLICATION • For securing, fastening and sealing threaded connections such as bolts, stud bolts, nuts, threaded **HIGH-STRENGTH SCREW** plugs, thread inserts, ball bearings and roller bearings, which do not normally have to be detached. RETAINER The high-strength threadlocker is for use in the ART.-NO. 0893270050 automotive and commercial vehicle industry, in metalworking and tool manufacturing, shipbuilding, mechanical engineering and engine construction, and electrical and electronics construction. APPLICATION • Suitable for all applications requiring good shear **SPECIAL 2C ADHESIVE SET 5** and/or impact strength of glass, ceramic and metal, as well as combinations thereof. Also PCS suitable for materials with very different coefficients ART.-NO. 089340 of expansion, even with temperature and climate chanaes. APPLICATION Cars: Spoilers, radiator grills, panel clips, bumpers, **PLASTIC ADHESIVE REPLAST®** WURTH brackets on headlights and radiators etc. EASY FAST HGVs and buses: Aprons, bumpers, air intake pipes, ART.-NO. 08935003 wheel arches etc Motorcycles:All panelling APPLICATION • For fastening cylindrical joints such as bushings and **BEARING RETAINING** bearings exposed to high temperatures. The bear-**COMPOUND HIGH-STRENGTH** ing retaining compound is for use in the automotive and commercial vehicle industry, in metalworking AND HEAT-RESISTANT and tool manufacturing, shipbuilding, mechanical ART.-NO. 0893620050 engineering and engine construction, and electrical and electronics construction. APPLICATION **BUTYL TAPE** · Ideally suited for connecting seams and bonding ART.-NO. 0894700122 vapour barrier films, overlap seals for assembly parts in the automotive and roof area, façade and equipment construction, in the furniture and interior construction industry, in sanitary and electrical installation as well as all similar applications such as involving grommets, sleeves, cable end caps or similar components. **DECORATIVE TRIM ADHESIVE**

DECORATIVE TRIM ADHESIVE TAPE 12MM ART.-NO. 0894910

ART.-NO. 0894910 APPLICATION

 For fastening decorative and functional strips, lettering, emblems, panels and brackets in the automotive industry For affixing nameplates to machines In combination with mechanical fastening elements for spoiler mounting VARIANTS
Art.-no. Width
08949101 24 mm



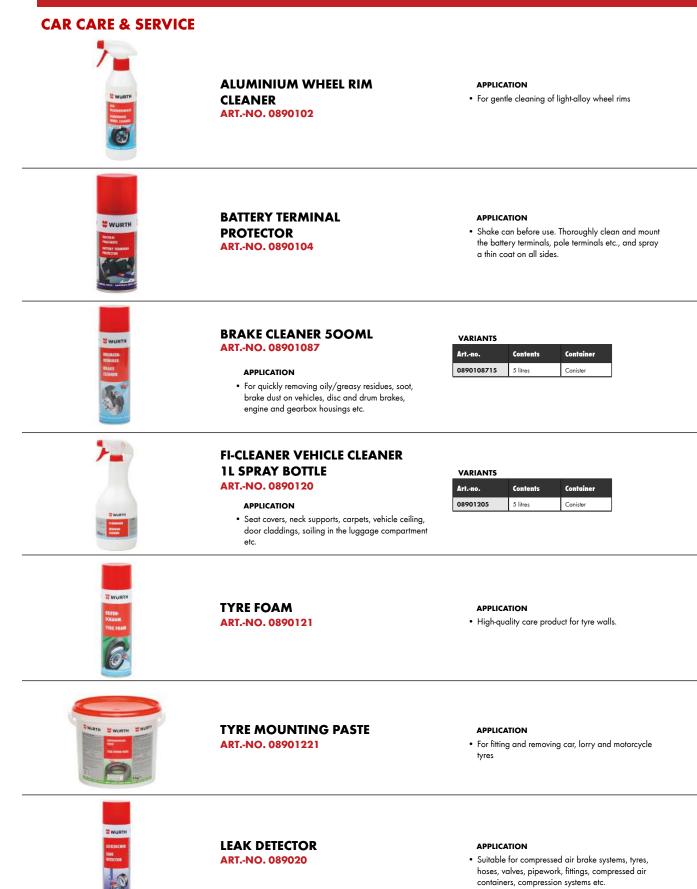



CAR CARE & SERVICE



RUST REMOVER ROST-OFF 400ML AEROSAL CAN

ART.-NO. 0890200004

GLASS AND WINDOW

APPLICATION

CLEANER

ART.-NO. 08902205

 For releasing rusty and oxidised screw connections on passenger cars, lorries, agricultural and construction machinery, assemblies and devices

VARIANTS

Artno.	Contents	Container
0890200	400ml	Aerosol can
0890300	5	Canister

APPLICATION

For cleaning glass and smooth surfaces. For passenger car/truck and bus windscreens, windows
and frames, mirrors, ceramics, tiles as well as sensitive surfaces such as paint and plastic, photovoltaic
and scratchproof glazing.

Ш



WURTH

COCKPIT CLEANING AND CARE SPRAY

ART.-NO. 08902221

APPLICATION

 For cleaning and care of passenger car, truck and bus interiors. For instruments, door coverings, plastics and rubber mats.

WURTH Amscatter Kitte saats

ACTIVE GLASS CLEANER ART.-NO. 089025

APPLICATION

 Dissolves insect residue, bird droppings, road dust, nicotine deposits, greasy dirt, silicone residue and rubber marks from glass windows, car windows, mirrors and painted surfaces.



ENGINE SEALING COMPOUND SILICONE SPECIAL 180 RED ART.-NO. 0890321

APPLICATION

 For sealing engines, transmissions and bodywork, cylinder heads, crankcases, oil sumps, radiators, differentials, light housings, indicator housings, weld seams etc.

VARIANTS

Artno.	Colour	Weight of content
0890321	Red	73 g
0890323	Black	86.8 g



ENGINE SEALING COMPOUND SILICONE RTV 343 ART.-NO. 0890324085

Permanent elastic silicone sealing compound for

engines and vehcile body. • For sealing surfaces, gaps and cracks. Such as oil sumps, thermostat housing, cylinder heads, crank-

cases, radiators, gearboxes, bodywork etc.



RADIATOR SEALANT FOR ALL ENGINES WITH COOLING SYSTEMS WITHOUT FILTER SYSTEMS ART.-NO. 5861501300

APPLICATION

APPLICATION

 Seals hairline cracks in radiator, engine block or cylinder head. Leaking hose connections can also be sealed. Permanent sealing of hairline cracks and leakage points protects the cooling circuit and combustion chamber from leaks. Radiator sealant prevents loss of coolant.



CAR CARE & SERVICE

WURTH	INDUSTRIAL CLEANING WIPES ARTNO. 089090090	 APPLICATION Thorough and gentle at removing even the heaviest types of soiling such as oils, greases, adhesives, paints, tar and lubricants. Tool cleaning Surface cleaning Hand cleaning
	MANUAL CAULKING GUN FOR CARTRIDGES BASIC ARTNO. 0891001	APPLICATION • For applications with 310 ml cartridges
T	UNDERBODY PROTECTION GUN ARTNO. 08911060	APPLICATION • For applying stone chip and underbody protection products containing solvents.
	UNDERCOATING SPRAY GUN FOR APPLYING GRAVEL GUARD AND UNDERCOATING PRODUCTS CONTAINING SOLVENTS ARTNO. 08911063	APPLICATION • For applying liquid undercoating and gravel guard based on bitumen, natural rubber plastic, synthetic resin and wax in special containers.
	1C FOAM GUN PURLOGIC® XPRESS FOR PROFESSIONAL APPLICATION OF 1-COMPONENT GUN FOAMS ARTNO. 08911524	APPLICATION • The gun is used to apply 1-component polyure- thane foam. All commercially available gun foams in aerosol spray cans with standard screw-on adapter are suitable. Being able to precisely adjust the PU foam quantity means that the gun is suitable for controlled dispensing and customised filling of joints, thereby enabling precise and secure installation.
	CAULKING GUN UP TO 300 ML 14:1 ARTNO. 0891400610	 APPLICATION Robust sausage pack applicator gun can be converted for cartridges of different sizes and thicknesses Transmission ratio 14:1 Immediate power transmission to the push rod possible Easy to clean By simply unscrewing the blue pack piston, also suitable for processing 290 to 310 ml cartridges
	PRODUCT-SPECIFIC PRESSURE SPRAYER, UNFILLED ARTNO. 0891503002	 APPLICATION Refillable empty pump spray bottle for easy application of products from canisters or drums Break-proof, empty 1 litre container Easy opening owing to surface feel elements



CAR CARE & SERVICE

The second se	AIR PAINT SPRAY GUN HVLP ARTNO. 0891701300	NOTICE Nozzle size • 0891 702 130 1.3 mm • 0891 702 140 1.4 mm • 0891 702 170 1.7 mm
C WURTH Statistics Recentation Statistics Statistics	PAINTABLE BODY SEALANT ARTNO. 0892010	APPLICATION • Suitable for sealing metal joints, scratches, overlaps and spot weld seams on front and rear skirts, the boot floor, the entire undercarriage, in the passenger compartment, on the sidewalls and on the wheel wells.
	GRAVEL THROW AND UNDERBODY PROTECTION ARTNO. 0892075200	APPLICATION • For repairing and restoring the original structure and for protecting against stone chips and corro- sion in all visible areas, e.g. front and rear aprons, side members, bumpers and chassis on cars, trucks and buses. Ideally suited for use as an anti-hum- ming compound for wheel wells and chassis.
	GRAVEL THROW AND UNDERBODY PROTECTION ARTNO. 0892075250	APPLICATION • For repairing and restoring the original structure and for protecting against stone chips and corro- sion in all visible areas, e.g. front and rear aprons, side members, bumpers and chassis on cars, trucks and buses. Ideally suited for use as an anti-hum- ming compound for wheel wells and chassis.
	PREMIUM RIM CLEANER ARTNO. 0893476505	APPLICATION • The acid-free combination of active agents removes even the most stubborn dirt, such as firmly adhering brake abrasion, road dirt, oil and rubber residues and surface rust particles from all steel and light-alloy rims.
WURTH RURSTFOMPLIGH PLATIC CARE	PLASTIC CARE ARTNO. 0893477	APPLICATION • For unpainted plastic bumpers, exterior mirrors, panel parts, spoilers, tyre walls, rubber seals etc.
	ENGINE FLUSH AND CLEANER FOR USE IN ALL PETROL AND DIESEL ENGINES ARTNO. 5861310400	APPLICATION • Suitable for all mineral and synthetic-based engine oils. Suitable for petrol and diesel engines Caution: Not suitable for use in motorcycles with oil bath clutch that share a joint oil circuit.




CAR CARE & SERVICE

WURTH Helicaladi Halapater Caspater Caspater	CAVITY WAX ARTNO. 0892082	APPLICATION • For long-lasting protection of areas in vehicle body cavities prone to corrosion. Used for subsequent treatment of existing seals and for restoring corrosion protection after accident repair work.
	1C ASSEMBLY FOAM PURLOGIC® EASY ARTNO. 0892143	APPLICATION • High-quality and secure insulating and filling of cav- ities, such as pipe ducts, joints, wall joints and wall openings. Adheres to surfaces such as concrete, marble, stone, hard PVC, metal and wood with the exception of PE, silicone, PTFE, grease and similar surfaces. Ice blue foam colour provides visual confirmation of installation.
E WURTH	PURLOGIC® FAST 2-COMPONENT FRAME FOAM ARTNO. 0892144	 APPLICATION For high-quality and secure wooden and steel door frame installation, window sill connections*, for filling larger cavities, such as roof beams, bath and shower tub filling and model and mould construction. * Must be protected from a compressive load with a sufficient supporting load. Adheres to concrete, stone, hard PVC and wood.
C weater Big and Big a	HIGH-TEMPERATURE SILICONE ARTNO. 0892330	 APPLICATION For sealing in the construction of furnace units, heating units, air conditioners, washing machines and dryers No primer required: Stainless steel, enamel, glass, tiles Primer required: aluminium (bare, anodised and powder-coated), chrome
	RAPID WINDSCREEN CLEANER IN DISPLAY CARTON ARTNO. 0892333	APPLICATION Add rapid cleaner to windscreen wash depending on the wash water volume.
	BASIC UV LEAK DETECTION ADDITIVE ARTNO. 0892764134	APPLICATION • Can be used in R134a, R1234yf and R744 air-conditioning systems as well as in air-condition- ing systems with electric compressors (hybrid, start/ stop and electric vehicles) for reliably detecting of leaks and micro-leaks.

CAVITY WAX



CAR CARE & SERVICE

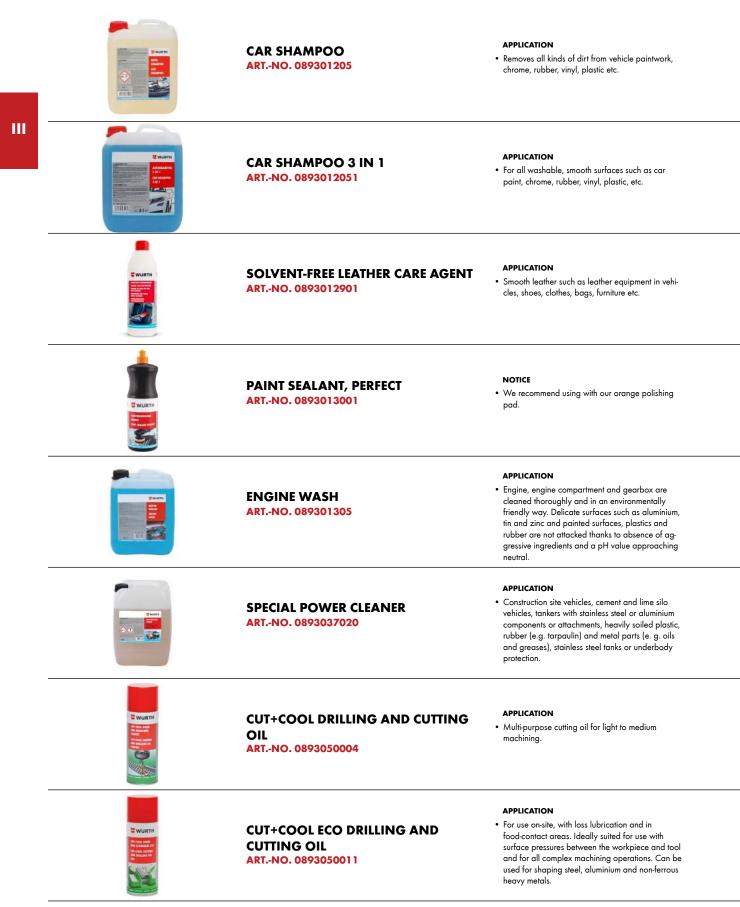




CAR CARE & SERVICE

	CUT+COOL ULTRA COOLING LUBRICANT ARTNO. 0893050030	APPLICATION • Semi-synthetic water-miscible cooling lubricant, suit- able for light to medium-heavy machining of metal involving chip production, including grinding.
	MAINTENANCE OIL MULTI ARTNO. 089305540	APPLICATION • Versatile multi-purpose spray
	LUBRICATING OIL MULTI WS6 ARTNO. 0893086400	 APPLICATION Lubricates, cleans and maintains Lubricates closures, hinges, bushings, chains and door locks Stops squeaking and creaking, and lubricates anything that is seized or jammed Cleans and protects plastic and metal parts, e.g. panelling and housing Removes rust and protects against corrosion
	KLEBFIX SUPERGLUE ARTNO. 089309	APPLICATION Superglue for bonding metal, plastic and rubber parts with and to each other.
Concerne Horpsola Warang Haavas	SEALANT REMOVER ARTNO. 08931000	APPLICATION • Wide range of uses on metal, wood, glass, ceramic, polyethylene and polypropylene
	PERFECT WELD SPRAY ARTNO. 0893102100	APPLICATION • Perfect weld spray is a biological anti-spatter spray for aluminium, non-ferrous heavy metals, structural steel, welding torch nozzles and stainless steels.
Contraction of the second seco	SILICONE SPRAY ARTNO. 0893221	APPLICATION For bumpers, protective strips, plastic rails and guides, door and sealing rubbers, rubber cuffs and hoses.



CAR CARE & SERVICE

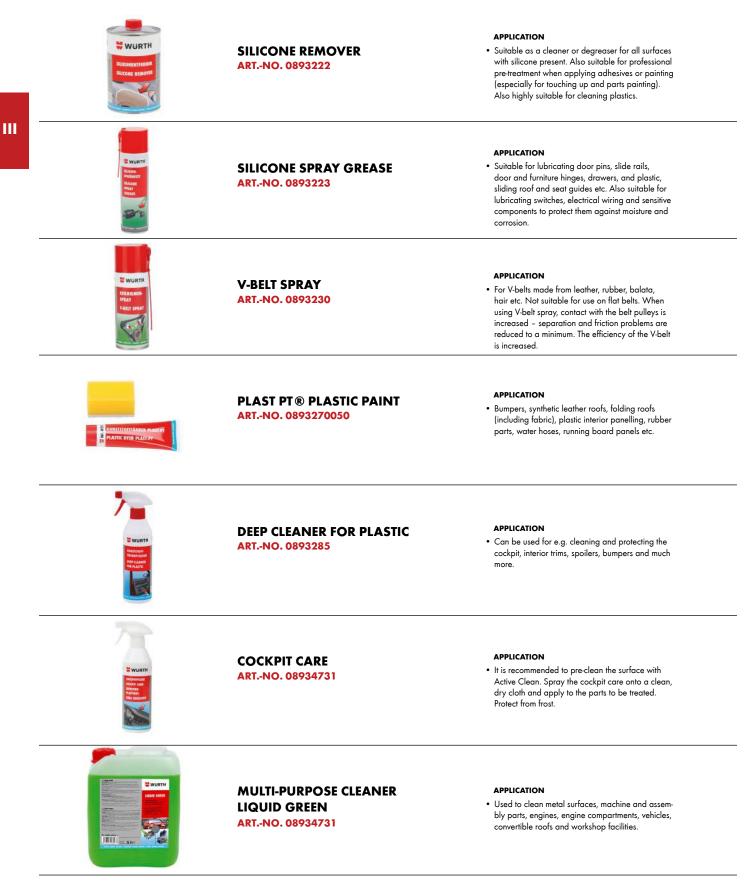



CHEMICALS LUBRICANTS APPLICATION • Extremely high-pressure-resistant partly synthetic oil for universal lubrication and for high pressure loads. **ADHESIVE LUBRICANT HHS** • Suitable for universal lubrication and for high pressure loads, e.g. shifting, accelerator and clutch 2000® linkages, Bowden cables, pins, joints, hinges, revers-ART.-NO. 0893106 ing levers, lock strikers, drag link ends, slide rails, chain wheels, toothed racks, open gearwheels and much more. **HHS® CLEAN ADHESIVE** APPLICATION • Highly effective pre-cleaner and bond improver LUBRICANT PRE-CLEANER (primer) specially tailored to HHS products. ART.-NO. 089310610 **ADHESIVE LUBRICANT HHS®** APPLICATION 5000 • Extremely temperature-resistant, fully synthetic penetrating oil with PTFE. Provides optimum lubrication ART.-NO. 08931063 safety in everyday use. APPLICATION • Fling-proof low-viscosity grease with dual effect: Penetrating properties of an oil, adhesive and **ADHESIVE LUBRICANT HHS®** pressure-resistant like grease. 1000 Suitable for lubricating under difficult re-lubrication ART.-NO. 08931064 conditions during maintenance and service work, e.g. internal bearings, wire ropes, joints, shafts, roller bearings. APPLICATION • EP long-life spray grease with a high protective factor against weathering and environmental **ADHESIVE LUBRICANT HHS®** influences. Suitable for exposed lubricating points with heavy 500 dirt and weather influences, e.g. gearwheels, ART.-NO. 08931065 bearings, wire cables, spring balancers, slide bearings and much more. HHS 500 is ideally suited for exposed outdoor lubrication thanks to its low adhesion of dust and dirt. **ADHESIVE LUBRICANT** APPLICATION • Shear-proof dry synthetic wax with PTFE and **HHS®100** exceptionally good creep properties. ART.-NO. 08931066 WURTH **ADHESIVE LUBRICANT HHS®** APPLICATION High-quality, white long-life maintenance grease 200 with PTFE. Optimum identification of points of ART.-NO. 08931067 lubrication during maintenance and service work, e.g. hinges, joints, slide rails etc.

LONG-LIFE SPRAY GREASE FOR EXCELLENT PROTECTION

Ш

~Inspired by You, Made by Würth. 33



LUBRICANTS

	DRY LUBRICANT SPRAY PTFE ARTNO. 0893550	APPLICATION • Transparent, dirt-resistant dry lubricant for light to medium loads.
	COPPER SPRAY CU 800 300ML ARTNO. 0893800	APPLICATION • The high temperature-resistant lubricant is suitable for lubricating the backs of disc brake pads (prevents squeaking noises), screw connections (exhaust manifold screws, spark plug threads etc.), bearings, pivot points, joints, sliding surfaces etc. Prevents solid seals from becoming baked on and is also suitable for contact protection on the nozzles of gasshielded arc welding guns and on batteries and battery terminals.
WURTH Crass	COPPER PASTE CU 800 1L ARTNO. 08938002	APPLICATION • The high temperature-resistant lubricant is suitable for lubricating the backs of disc brake pads (prevents squeaking noises), screw connections (exhaust manifold screws, spark plug threads etc.), bearings, pivot points, joints, sliding surfaces etc. Prevents solid seals from becoming baked on and is also suitable for contact protection on the nozzles of gas-shielded arc welding guns and on batteries and battery terminals.





FOOD GRADE



MULTI-PURPOSE GREASE III ART.-NO. 0893107002

APPLICATION

 Physiologically non-hazardous, colourless grease with multi-functional additive combination for lubricating and protecting seals, jointed and moving parts in which there is a risk of direct contact between the lubricant and foodstuffs.

E WURTH Grand We arr Without at Str

FOODSTUFFS LUBRICATING OIL

ART.-NO. 08931071

APPLICATION

 Colourless special lubricant with creeping properties for the food industry as well as for the beverage, pharmaceutical and clinical sectors.



ADHESIVE LUBRICANT HHS® FOODSTUFFS ART.-NO. 08931076

APPLICATION

 Suitable for universal lubrication at high pressure loads, e.g. for chains, racks, joints, levers, bearings, sliding points, cables, open drives, and hinges.



FOOD-GRADE SILICONE ACETATE ART.-NO. 08925501


APPLICATION

 For sealing joints that come into contact with drinking water or food, e.g. in commercial kitchens, butcher's shops, breweries, on sales counters and in walk-in refrigerators and for aquarium construction.

SAFE AND DURABLE, MEETING THE HIGHEST FOOD SAFETY STANDARDS.



CORROSION PROTECTION

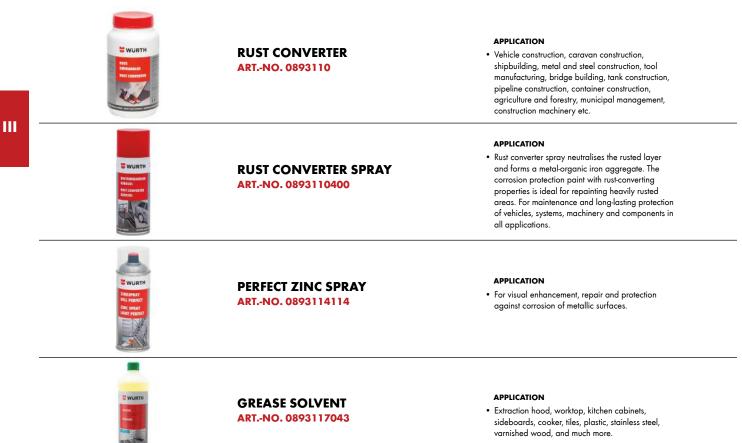



READY TO EXPERIENCE WURTH ADVANTAGE?





SCAN ME TO VISIT OUR E-SHOP



